


# Meltio Robot Cell

## Plug-and-play Solution for the Meltio Engine Robot Integration

Meltio Robotic Cell is an affordable turn-key solution for Meltio Engine Robot Integration. It is an intuitive plug-and-play solution. It's the perfect platform for large and complex 3D printing, repair, cladding and feature addition.

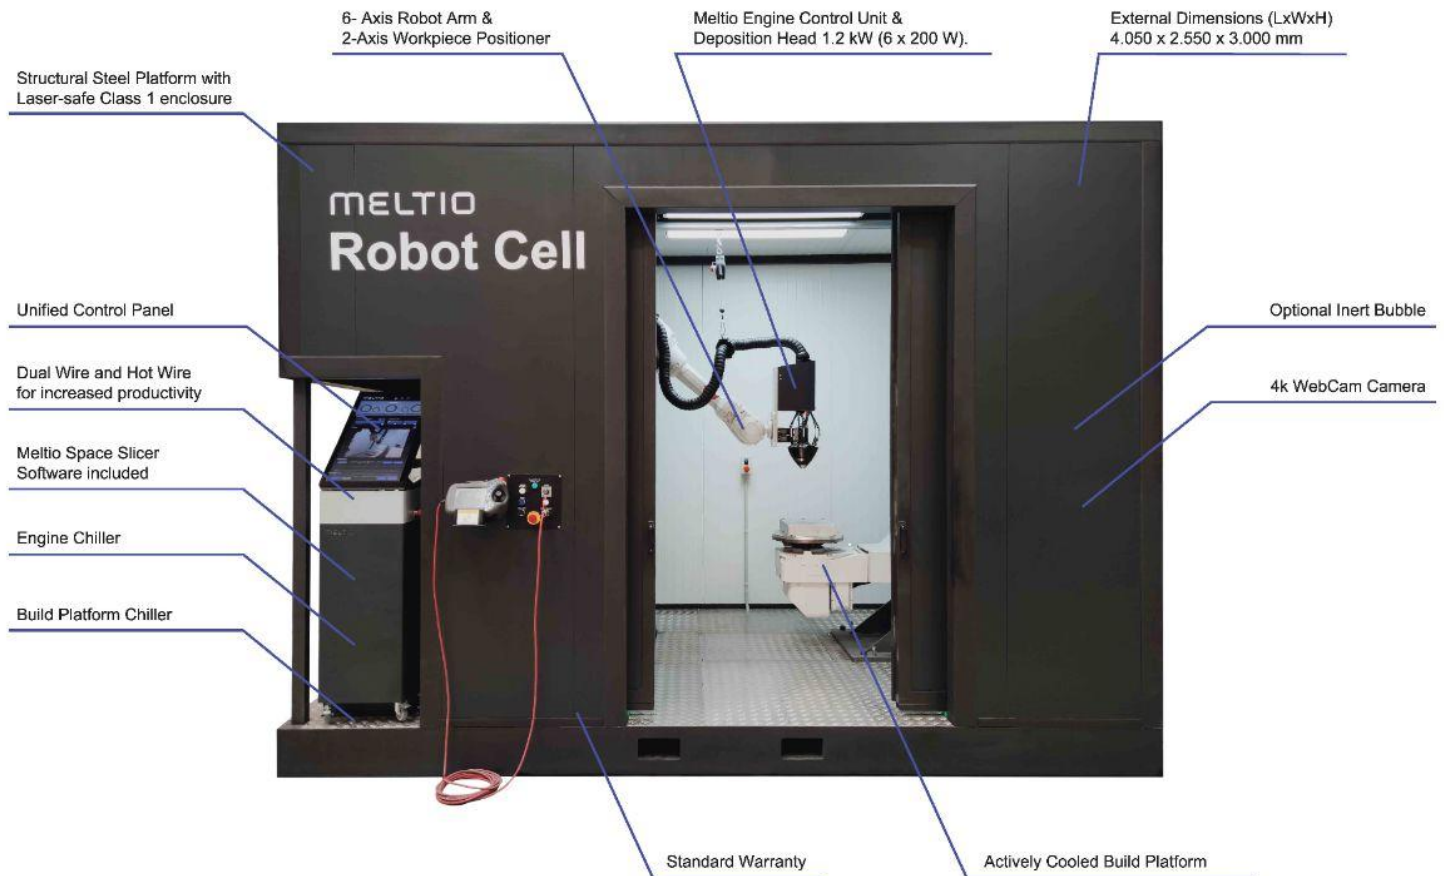

## Value Proposition

### Plug and Play Installation

Allows the customer to **receive a ready to use** cell for robotic metal 3D printing, **removing the integration process** and long assembly lead times.

### Safe, Tested and Certified

**In accordance with European CE and laser safety regulations.** Multiple **quality controls** with the system integrated from factory.

### Best-in-class Components

**Robot and positioner on a self-supporting platform,** laser safe enclosure together with **Meltio Engine, Meltio Space and accessories.**

### Best-in-class Components

One week **on-site training** for enabling **the end user to be successful** with Meltio and **develop applications in short time.**

## Key Technical Features

**CLASS 1** Laser Product

---

**Meltio Space 1** (one) year subscription

---

**Large 3D Printing Volume** with Continuous positioner axes interpolation

---

All equipment and peripherals **anchored on the platform.**

---

Standard **CE certification**

---

**Steel platform** with leveling points and wiring ducts

**All cell controls unified on single control panel**

---

Everything is sent **integrated and tested**

---

The final reseller/integrator **focuses work on training and enabling the client to manufacture parts**

---

**Load an unload** from truck with **regular size and load forklift**

---

**Includes 300x400mm actively cooled build platform** and buildplates

## Technical Specifications - Electrical Requirements

**Power Input:**

Three phase 400V 50Hz

5 poles(3W+N+PE)

Protection up to 50A 20kw peak power consumption

Average power consumption at 15-18 A: -> 7kw

---

**Alternative Power Input Upon Request:**

Three phase 440V 60Hz 5 poles (3W + N + PE)

Three phase 230V 60Hz 3 poles (3W)

## Technical Specifications - Structure and Enclosure

**General Dimensions:**

4.050 x 2.300 x 3.000 mm

---

**Self-supporting steel platform**  
(4.050 mm length x 2550 mm width)

---

Prepared to **support the weight of the Cell and its components without deformations**

---

**Includes leveling points**

---

**Resistant to oxidation** or protected for this purpose

**Ducts for wiring and integration elements, allowing a clean floor**

---

**Laser safe** enclosure according to **IEC 60825-1** and **IEC 60825-4**

---

Robot Cell **product as Class 1** reducing the risks for the user

---

**Highly fire-resistant enclosure materials that do not produce toxic particles.Specifically:**

B-s2,d0 according to **UNE EN 13501-1**

## Technical Specifications - Integration and Safety

### Single three-phase connector input.

All **cell controls unified** on single control panel:

- **Cell Controls:** Open doors and arm security
- **Robot Controls:** Motors On, Mode Selector and Emergency

Connected to the customer's **local network (LAN) for PC interconnectivity**

ABB's SafeMove to **avoid collisions with enclosure**

Safe environment for the end customer

### European CE and laser safety regulations.

UCKA in UK and UL in America to be evaluated.

### Fully Tested

**Specific Quality Controls before and after integration**, ensuring maximum performance at its final destination.

**CLASS 1  
LASER PRODUCT**

## Technical Specifications - Supplies Area

### Meltio Engine Control Unit

### Engine and Build Platform Water Chillers

**External Feeders**, for spool holders and drums of +100kg

### Inert Gas Supply options:

- Attachments for three 50L Argon bottles with non-return valves.
- Optional Meltio Gas Regulator
- Or Supplied by customer



\* All these equipment and peripherals are anchored on this platform and may not exceed from the maximum dimensions of the self-supporting platform during transport.

## Technical Specifications - Load and Build Volume

**Load:** 500 kg max load (Standard)

**Positioner Interpolation:** Ø 1000 mm x 1200 mm

**Actively Cooled Build Platform:**  
Buildplate 300x400mm  
Buildplate 150x200mm  
Buildplate 120x100mm

**No Positioner Interpolation:**  
2000 x 1000 x 1000 mm  
Custom build platform not included  
No positioner movement, only robot tool orientation

\* The cooling bed allows control of the temperature of the prints as wells to protect the positioner, hardware that cannot be over 70°C on periods of more than 24h.

## Technical Specifications - Engine Software

### Updated and renewed User Interface

---

**Custom profiles without the need of writing macros, every possibility parametrized**

---

HD Webcam

---

Compatible with **Welding Camera**

### Timeline for Sensors Analysis

---

**Live 3D model** based on **reading TCP positions** from robot

---

### Profiles for Meltio Materials and Meltio Space

## Technical Specifications - Engine Software

Proprietary robot slicer focusing on User Experience, closing the gap between additive manufacturing users and robotics. Fully tailored customer experience around the Meltio Engine Robot integration product with custom developed Meltio print profiles for the Meltio materials portfolio. The low capital and running costs of the Meltio Engine are also translated to the software licensing model.



### Cell Configurator

---

Robot library and post-processor built-in for ABB, KUKA, FANUC and YASKAWA, with no extra cost.

### Robot kinematics simulation and Collisions check

---

Virtual model of real robot movement to ensure great results. Collision check with the part as being printed.

### Specific Toolpath Strategies

---

Planar, non planar and variable extrusion toolpaths easily defined. 2-axis Positioner interpolation in 2 clicks.

### Meltio Material print profiles

---

Optimized Laser Power and Feeder Speed for every application: Hollow or solid parts, Stainless Steel 316L, 308L, Mild Steel ER70S, Titanium 64 and Nickel 718.